

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 February 2001 (22.02.2001)

PCT

(10) International Publication Number
WO 01/12519 A1

(51) International Patent Classification⁷: B65D 43/06

(21) International Application Number: PCT/DK00/00447

(22) International Filing Date: 10 August 2000 (10.08.2000)

(25) Filing Language: Danish

(26) Publication Language: English

(30) Priority Data:
PA 1999 01114 11 August 1999 (11.08.1999) DK

(71) Applicant (for all designated States except US): SUPERFOS A/S [DK/DK]; Frydenlundsvej 30, DK-2950 Vedbæk (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): THORSØ, Holger [DK/DK]; Superfos A/S, Frydenlundsvej 30, DK-2950 Vedbæk (DK).

(74) Agent: HOFMAN-BANG A/S; Hans Bekkevolds Allé 7, DK-2900 Hellerup (DK).

(81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PACKAGING

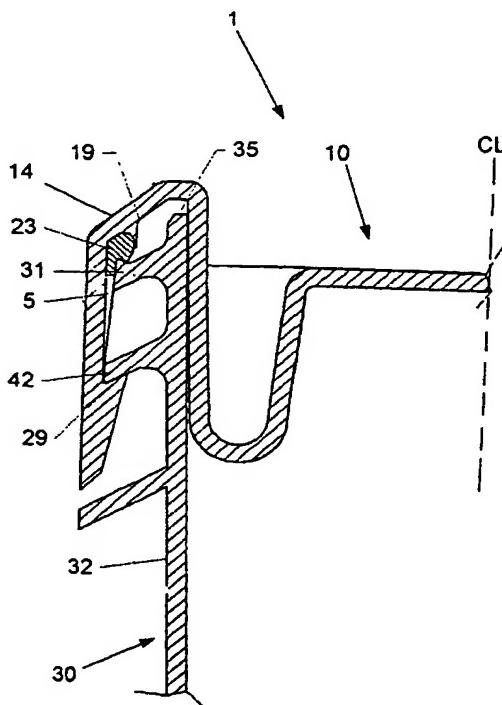

(57) Abstract: The invention relates to a package of a plastics material and consisting of a container and a lid adapted to be engaged with each other by snap engagement, there being provided complementary engagement faces which engage each other for establishing said snap engagement. An annular resilient sealing member is arranged between the engagement portion (40) and the bottom wall (19). The invention is characterized in that an axial compression of the sealing member (23) is provided during application of the lid (10), said compression being partially relieved when said engagement faces (29, 42) engage each other.

WO 01/12519 A1